



strands®

-lighting division

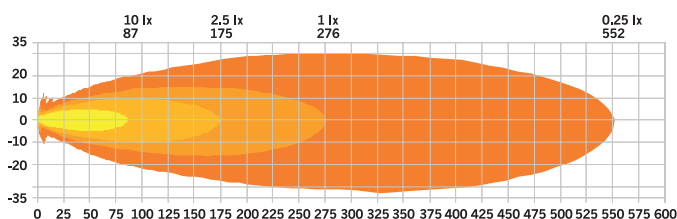

NUUK D-LINE MC

DRIVING LIGHT

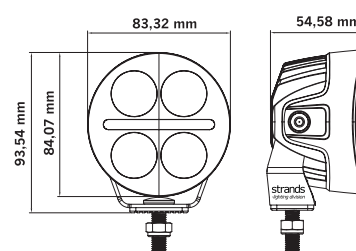

Voltage	10-32V DC
Consumption	39 W
Actual lumen	2540 lm
1 lux @	276 m
Color temperature	5700K
Beam pattern	Optimized beam
IP-class	IP68/IP69K
Color lens	Clear
Position light	White and yellow
Connection	DT-4
Cable length	150 mm

Material housing	Aluminium
Material lens	Polycarbonate
Length	83,32 mm
Depth	54,58 mm
Height	84,07 mm
Height including bracket	93,54 mm
Operating temperature	-30 - +65°C
E-approved	ECE R149 (R113), R148 (R7)
Ref	12,5
EMC-certificate	ECE R10

Part No. 809288